

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 April 2002 (11.04.2002)

(10) International Publication Number
WO 02/30080 A1

PCT

(51) International Patent Classification⁷: H04L 27/233,
25/06, H04B 17/00, 1/10

(21) International Application Number: PCT/EP01/11084

(22) **International Filing Date:**
25 September 2001 (25.09.2001)

(25) Filing Language: English

(26) **Publication Language:** English

(30) Priority Data: 09/678,164 2 October 2000 (02.10.2000) US

(71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET L M ERICSSON** (publ)
[SE/SE]; S-126 25 Stockholm (SE).

(72) Inventor; and

(75) **Inventor/Applicant (for US only): JAKOBSSON, Peter**
[SE/SE]; Uardavägen 6D, S-224 71 Lund (SE).

(74) Agent: ERICSSON MOBILE PLATFORMS AB; IPR Department, S-221 83 Lund (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ADAPTIVE FILTERING AND DC OFFSET REMOVAL FOR COMMUNICATIONS SYSTEMS

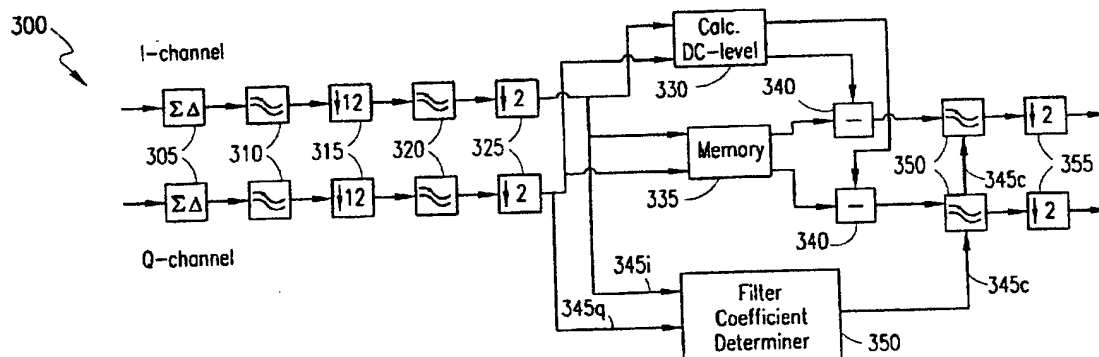

(57) Abstract: Adaptive channel filtration enables a filter to be adaptively optimized for both co-channel and adjacent channel rejection performance (e.g., even as conditions change in a Rayleigh-fading environment). Principles of the present invention may be incorporated into a homodyne-based receiver architecture (200,300). In an exemplary homodyne-based receiver (200,300), the power of the adjacent channel interferer is calculated (e.g., determined, estimated, etc.), and an associated (e.g., low pass) channel filter (210,220,230) is adapted depending on a ratio involving the total power (e.g., the desired channel plus the adjacent channel) and the adjacent channel power. In one or more embodiments, such a ratio is used with a look up table (500) to produce a desired channel filter bandwidth, which may be used as a basis for creating coefficients for utilization by a low pass channel filter.

BEST AVAILABLE COPY

WO 02/30080 A1

ADAPTIVE FILTERING AND DC OFFSET REMOVAL FOR COMMUNICATIONS SYSTEMS

BACKGROUND OF THE INVENTION

Technical Field of the Invention

5 The present invention relates in general to the field of communications systems, and in particular, by way of example but not limitation, to adaptive channel filtrations that are responsive to relative levels of received signal power in wireless communications systems.

Description of Related Art

10 Mobile wireless communication is becoming increasingly important to both individuals and organizations for providing safety, convenience, improved productivity, and simple conversational pleasure to subscribers of wireless communications services. One prominent mobile wireless communication option is
15 cellular communication. Cellular phones, for instance, can be found in cars, briefcases, purses, and even pockets. While the number of cellular phone subscribers continues to rise, the types and quality of services being demanded by cellular phone subscribers are dramatically rising as well. One type of service whose popularity has
20 been skyrocketing, especially with the emerging prominence of e-mail, faxing, and the Internet, is data transmission.

 Data may be transmitted on, for example, existing voice, data, and/or control channels. However, many of the new features that subscribers are demanding require extraordinarily high data transfer rates that cannot be effectively provided by existing channels. New mechanisms for transmitting at extraordinarily high data rates are
25 needed to meet the demand. In accordance with the Global System for Mobile Communications ++ (GSM++) standard, a new scheme termed "Enhanced Data rates for Global Evolution" (EDGE) is under development. EDGE is intended to increase the data transfer rate available to mobile users.

 EDGE systems achieve a high data transfer rate by changing the coding and
30 modulation. Consequently, EDGE systems need a higher Carrier-to-Interference (C/I) performance ratio to achieve the intended higher data transfer rates. However, normal GSM cell planning specifications are used when designing EDGE systems so as not to reduce the total number of subscribers that may be accommodated by a given system.

Because GSM cell planning specifications are reused, the requirements relating to adjacent channel rejection (C/I_{A1}) are of the same magnitude as for an ordinary GSM system. As a result, EDGE channel filters should not only avoid disturbing the C/I-performance, but they should also be capable of meeting the ordinary GSM adjacent
5 channel requirements.

Conventional approaches are directed to optimizing the channel filter for the best compromise between adjacent channel rejection (C/I_{A1}) and co-channel (C/I) performance. This compromise, by definition, is optimal for only a single situation, if any. Consequently, receivers using the conventional approach are sub-optimal in
10 most situations inasmuch as they use a fixed, pre-set compromise between adjacent channel rejection and co-channel performance.

SUMMARY OF THE INVENTION

The deficiencies of conventional approaches are overcome by the method,
15 system, and arrangement of the present invention. For example, as heretofore unrecognized, it would be beneficial if the channel filter could be adaptively optimized responsive to current channel conditions. In fact, it would be beneficial if the channel filter could be adaptively optimized responsive to current Rayleigh-fading conditions.

20 In accordance with principles of certain embodiment(s) of the present invention, the optimal channel filter design changes along with the Rayleigh-fading in Rayleigh-faded environments. Also, the channel filter can be advantageously changed on a burst basis so that optimal performance is achieved in Rayleigh-fading environments, instead of merely in a predicted average environment. Principles of the
25 present invention may be incorporated into a homodyne-based receiver architecture. In an exemplary homodyne-based receiver, the power of the adjacent channel interferer is calculated (e.g., determined, estimated, etc.), and an associated channel filter is adapted depending on the ratio between the total power (e.g., the desired channel plus the adjacent channel) and the adjacent channel power.

30 In one or more embodiments, the ratio between the total power and the adjacent channel power is used with a look up table to produce a needed channel filter bandwidth. (The look up table may be derived, for example, from a graph of frequency versus power spectrum magnitude.) The channel filter bandwidth may be

relied on to create coefficients for utilization by a low pass filter. The low pass filter therefore optimally and adaptively filters out the adjacent channel in favor of the desired signal.

5 The above-described and other features of the present invention are explained in detail hereinafter with reference to the illustrative examples shown in the accompanying drawings. Those skilled in the art will appreciate that the described embodiments are provided for purposes of illustration and understanding and that numerous equivalent embodiments are contemplated herein.

10 BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the method, system, and arrangement of the present invention may be had by reference to the following detailed description when taken in conjunction with the accompanying drawings wherein:

FIGURE 1 illustrates an exemplary portion of an exemplary wireless network system with which the present invention may be advantageously practiced;

FIGURE 2 illustrates an exemplary homodyne-based receiver architecture that may be implemented in the exemplary wireless network system of FIGURE 1;

FIGURE 3A illustrates an exemplary homodyne-based receiver architecture in accordance with the present invention that may be implemented in the exemplary wireless network system of FIGURE 1;

FIGURE 3B illustrates a portion of the exemplary homodyne-based receiver architecture of FIGURE 3A in accordance with the present invention that may be implemented in the exemplary wireless network system of FIGURE 1;

FIGURE 4 illustrates an exemplary graph of frequency versus power spectrum magnitude;

FIGURE 5 illustrates an exemplary table with an exemplary relationship between adjacent channel rejection and channel filter bandwidth;

FIGURE 6A illustrates an exemplary method in flowchart form for adaptively filtering a signal in accordance with the present invention; and

FIGURE 6B illustrates another exemplary method in flowchart form for adaptively filtering a signal in accordance with the present invention.

DETAILED DESCRIPTION OF THE DRAWINGS

In the following description, for purposes of explanation and not limitation, specific details are set forth, such as particular circuits, logic modules (implemented in, for example, software, hardware, firmware, some combination thereof, etc.), techniques, etc. in order to provide a thorough understanding of the invention. However, it will be apparent to one of ordinary skill in the art that the present invention may be practiced in other embodiments that depart from these specific details. In other instances, detailed descriptions of well-known methods, devices, logical code (e.g., hardware, software, firmware, etc.), etc. are omitted so as not to obscure the description of the present invention with unnecessary detail.

A preferred embodiment of the present invention and its advantages are best understood by referring to FIGURES 1-6B of the drawings, like numerals being used for like and corresponding parts of the various drawings. Aspects of the GSM standard will be used to describe an embodiment of the present invention. However, it should be understood that the principles of the present invention are applicable to other wireless communication standards (or systems), especially those that can benefit from C/I and C/I_{A1} performance compensation.

With reference to FIGURE 1, an exemplary portion of an exemplary wireless network/communications system with which the present invention may be advantageously practiced and/or employed is illustrated generally at 100. The (portion of) wireless communications system 100 includes a cell 105 that is served by a base station (BS) 110. The BS 110 typically includes a base transceiver station (BTS) 110A and optionally includes a BS controller (BSC) 110B. Within the cell 105 are multiple mobile terminals (MTs) (e.g., mobile stations (MSs), etc.) 115A and 115B, each of which may be in communication with the wireless network infrastructure as represented by the BS 110. Each MT 115 may be, for example, a hand-held cellular phone (e.g., the MT 115A), a vehicle-mounted MT (e.g., the MT 115B), a data terminal with a wireless link (not specifically shown), etc. While only two MTs 115 are shown in the wireless communications system 100, many more MTs 115 are usually present within each such cell 105. Also, it should be noted that the wireless communications system 100 is usually composed of many such cells 105 and BSs 110.

With reference to FIGURE 2, a homodyne-based receiver architecture that may be implemented in the exemplary wireless network system of FIGURE 1 is illustrated generally at 200. The receiver architecture 200 includes branches for both the in-phase (I)-channel and the quadrature-phase (Q)-channel. Sigma-delta analog-to-digital (A/D)-converters 205 may operate at an exemplary forty-eight (48) times over sampling. The sigma-delta A/D-converters 205 convert the received analog signal to a digital format for signal manipulation. The exemplary 48 times oversampling ratio is adequate to achieve a dynamic range that is required by the GSM standard without needing an Automatic Gain Control (AGC).

The receiver architecture 200 also includes three (e.g., digital) low pass (LP) filters 210,220,230 and three decimation blocks 215,225,235. The three LP filters 210,220,230 remove noise and received interfering signals from the desired signal. The LP-filtering also enables decimation of the received data without having the noise or received interfering signals folded into the spectrum of the desired signal. The LP filters 230 are the narrowest filters. They are used to filter out the desired channel and to block the first adjacent channel, and they are typically the most complex filters. The optimal bandwidth of these LP filters 230 are set based on the adjacent channel GSM requirements. The decimation blocks 215,225,235 reduce the data rate by the exemplary "12", "2", and "2" decimation factors, respectively.

Because the received signal is converted down to direct current (DC) in homodyne receivers, it is necessary for the received signal to be separated from the DC-offset produced by imperfections in the homodyne receiver. To meet this need, the DC-offset is subtracted from the received signal. The DC-level calculation block 240 calculates the average DC value during, e.g., a received burst. Meanwhile, the received signal is stored in a memory 245 (e.g., a first-in first-out (FIFO) memory) while the average DC value is being calculated by the DC-level calculation block 240. After the average DC-offset is calculated by the DC-level calculation block 240, the average DC value may be subtracted from the DC-level of the received signal at the subtraction blocks 250 for both of the I-channel and the Q-channel components to correct for the DC-offset. The DC-offset-corrected signals for both of the I-channel and the Q-channel components may thereafter be forwarded from the subtraction blocks 250.

With reference to FIGURE 3A, an exemplary homodyne-based receiver architecture in accordance with the present invention that may be implemented in the exemplary wireless network system of FIGURE 1 is illustrated generally at 300. The receiver architecture 300 includes branches for both the I-channel and the Q-channel. Sigma-delta A/D-converters 305 may operate at an exemplary forty-eight (48) times over sampling. The sigma-delta A/D-converters 305 convert the received analog signal to a digital format for enhanced signal manipulation. The exemplary 48 times oversampling ratio is adequate to achieve a dynamic range that is required by the GSM standard without needing an AGC; however, it should be noted that other oversampling values may be utilized without departing from the scope of the present invention.

The receiver architecture 300 also includes two initial (e.g., digital) LP filters 310,320 and two initial decimation blocks 315,325. The two LP filters 310,320 remove noise and received interfering signals from the desired signal. The LP-filtering also enables decimation of the received data without having the noise or received interfering signals folded into the spectrum of the desired signal. The decimation blocks 315,325 reduce the data rate by the exemplary decimation factors of "12" and "2", respectively. To remove the DC offset present in homodyne-based receivers, the DC-offset may be subtracted from the received signal. The DC-level calculation block 330 may calculate the average DC value during, e.g., a received burst. It should be noted that other time periods can alternatively be used. Additionally, the received signal may be stored in a memory 335 (e.g., a FIFO memory) while the average DC value is being calculated by the DC-level calculation block 330. After the average DC-offset is calculated by the DC-level calculation block 330, the average DC-offset value may be subtracted from the DC-level of the received signal at the subtraction blocks 340 for both of the I-channel and the Q-channel components to correct for the DC-offset.

In contrast with the receiver architecture 200, the receiver architecture 300 includes at least one variable (e.g., adjustable) LP filter 350 for filtering out the desired channel and for blocking the first adjacent channel. The optimal filter bandwidth of these LP filters 350 may be established by adjusting the controlling coefficients based on the relative signal strengths of the desired and adjacent channels. The filter coefficient determiner 345 may receive as input the I-channel and

Q-channel component outputs from the decimators 325 on paths 345I and 345Q, respectively. The filter coefficient determiner 345, an embodiment of which is described in greater detail hereinbelow with reference to FIGURE 3B, determines appropriate coefficients for establishing an optimal filtering bandwidth for LP filters 350. These coefficients, or other control signal(s) for defining the bandwidth of a filter, are provided to the LP filters 350 on path(s) 345C. After the LP filtering by the LP filters 350, decimation blocks 355 reduce the data rate by the exemplary decimation factor of "2". The resulting signals for both of the I-channel and the Q-channel components may be forwarded thereafter for further processing.

With reference to FIGURE 3B, a portion of the exemplary homodyne-based receiver architecture 300 of FIGURE 3A in accordance with the present invention that may be implemented in the exemplary wireless network system of FIGURE 1 is illustrated at 345. An I-channel and a Q-channel component are received as input at the filter coefficient determiner 345 on paths 345I and 345Q, respectively. An I-channel and a Q-channel component are fed to high pass (HP) filters 360. The resulting HP filtered signals are forwarded to an amplitude/power calculation #1 block 365, which determines the amplitude of the adjacent channel power (e.g., of the adjacent channel interferer). An I-channel and a Q-channel component are also fed to an amplitude/power calculation #2 block 370, which determines the amplitude of the total power. Coefficient determination may be made based on the relationship between the total power and the adjacent channel power. In an exemplary GSM embodiment, the calculation of such a relationship between the adjacent channel and the wanted signal is performed at two times the GSM rate (e.g., $F_s = 2 * 13/48$ MHz).

The power calculations in the amplitude/power calculation #1 block 365 and the amplitude/power calculation #2 block 370 may be performed in a myriad of manners and with various numbers of samples, depending on the desired accuracy. An economical option is to "reuse" the hardware (not explicitly shown) that is used to calculate the power after the last channel filter (also not explicitly shown) of the exemplary homodyne-based receiver architecture 300 of FIGURE 3B. In certain embodiments, the power calculations may be accomplished by estimating the amplitude with the following exemplary approximation: $\text{Amp} = \text{Max}(I, Q) + 0.5 * \text{Min}(I, Q)$. It should be noted that other approximations or more exact techniques may be employed without departing from the scope of the invention. It should be

understood that "calculate/calculation/etc.", as they are used in this disclosure, encompass and embrace, at least, calculate, determine, estimate, ascertain, approximate, etc. Each of the amplitude/power calculation #1 block 365 and the amplitude/power calculation #2 block 370 forward their respective amplitude calculations to select filter coefficient(s) block 375. The select filter coefficient(s) block 375 may use an average relationship between the amplitude calculation results of the amplitude/power calculation #1 block 365 and the amplitude/power calculation #2 block 370 to determine the filter coefficients for the LP channel filters 350 (of FIGURE 3A). The filter coefficient(s) are passed from the select filter coefficient(s) block 375 to the LP channel filters 350 via path(s) 345C. In one embodiment, as is described in greater detail hereinbelow with reference to FIGURES 4 and 5, the filter coefficient(s) selection performed by the select filter coefficient(s) block 375 may be accomplished by linking different stored coefficients with/to different correspondence relationships between calculated amplitudes and filter bandwidths. It should be noted that the choice of the HP filter type may also impact performance, but such a choice should not be an overly critical aspect of performance.

The receiver architecture 300, using the filter coefficient determiner 345, enables the LP filters 350 to be adaptively optimized for both co-channel and adjacent channel rejection performance. It should be noted that in certain embodiments, a trade off exists between the adjacent channel suppression and the link performance (e.g., as measured by block error rate (BER) and raw bit error). Simulations have indicated that the position of the "BER-knee" (e.g., in graphs of C/I versus uncoded block error (UBLER)) changes with the simulated C/I. It should further be noted that the limiting factor on the C/I performance for the complete MT or BS therefore needs to be known before the filters are designed in order to prevent the channel filter from limiting the overall performance. Simulations have also indicated the existence of a trade off between adjacent channel suppression and the maximum C/I performance attainable without any significant degradation of the performance due to the filters. As a result, if/when the maximum C/I is set to a lower value by other parts of the, e.g., MT or BS, then it is possible to increase the adjacent channel rejection without any significant loss in the overall performance.

Continuing now with FIGURE 3B, the amplitude/power calculation #1 block 365 calculates the power of the adjacent channel, and the amplitude/power calculation

#2 block 370 calculates the power of the sum of the wanted signal and the adjacent channel. The ratio $P_{C/I}$ is determined therefrom as follows:

$$P_{C/I} = \frac{P_{Amp...calc... \#2...block} - P_{Amp...calc... \#1...block}}{P_{Amp...calc... \#1...block}} = \frac{C}{I_{Adj200kHz}}$$

It should be noted that the "200 kHz" is exemplary only, and other adjacent channel frequency values may be selected. Advantageously, if the signal values are converted into logarithmic amplitude(s) (e.g., by using existing hardware), such a calculation of a relationship involving the adjacent channel power and the total power transforms from a division to a simpler subtraction. In accordance with certain principles of the present invention, the ratio $P_{C/I}$ may be used to determine the optimal bandwidth of the adjacent channel filter as is described further with reference to FIGURES 4 and 5.

With reference to FIGURE 4, an exemplary graph of frequency versus power spectrum magnitude is illustrated generally at 400. In the graph 400 (which may be calculated using, for example, a commercial simulator such as Matlab), the wanted signal 405 is plotted together with multiple levels of interferer 410A-G so that the ratio $P_{C/I}$ may be used to determine the optimal bandwidth of the adjacent channel filter. The graph 400 covers the range $C/I_{Adj200kHz} = -12$ to $+6$ dB in steps of 3dB. (It should be noted that the power levels in the graph 400 may appear to be 3 dB too low. However, the interference spectrum is only plotted in the (exemplary) graph 400 for positive frequencies, so there should be identical copies centered at -200 kHz. In other words, half of the energy in the interfering signal is located at positive frequencies and half of the energy is located at negative frequencies.)

The graph 400 may be used to create a correspondence relationship between wanted bandwidth and the ratio $C/I_{Adj200kHz}$. For example, a look up table of wanted bandwidth as a function of the ratio $C/I_{Adj200kHz}$ may be established. Such a correspondence (e.g., a look up table, data structure, etc.) may be stored in a memory 380 (of FIGURE 3B), for example. Other techniques for storing or accessing the correspondence may alternatively be employed. In one embodiment, the bandwidth of the channel filter may be set by the point where the power of the interferer 410A-G equals the power of the wanted signal 405. With respect to interfering signal 410G,

for example, the wanted signal 405 is equal to the interfering signal 410G at approximately -12 dB along the y-axis (ordinate). The corresponding frequency along the x-axis (abscissa) is approximately 122 kHz, which results in a needed filter bandwidth of 78 kHz for the LP filters 350.

5 With reference to FIGURE 5, an exemplary table with an exemplary correspondence relationship between adjacent channel rejection and channel filter bandwidth is illustrated generally at 500. The table 500, or an equivalent data structure, may be stored in, for example, the memory 380 (of FIGURE 3B). The table 500 provides a correspondence between the ratio $C/I_{Adj200kHz}$ in dB of column 505 and
10 the filter bandwidth (BW) value in kHz of column 510. The first row, for instance, provides the above-explained correspondence between -12 dB in the column 505 of the interfering signal (410G) and the corresponding filter BW of 78 kHz in the column 510. A set of different filter coefficients for each bandwidth of a filter BW collection (such as that provided in the column 510) may be pre-calculated and stored
15 in a memory, such as the memory 380, in manner(s) known to those of ordinary skill in the art. For example, given the bandwidth and the complexity of the intended filter, it is possible to calculate appropriate coefficients using, e.g., a commercial simulator. It should be noted that the memory may be different from the memory used to store the table 500 and that the memory 380 may be constituted of one or more of many
20 different available memory types, such as read-only memory (ROM). The stored filter coefficients, once retrieved, may be forwarded along path(s) 345C (of FIGURE 3B). In this manner, differing sets of filter coefficients can be employed depending on the calculated power ratio $C/I_{Adj200kHz}$, thereby adapting the filtering parameters to the current operating conditions.

25 With reference to FIGURE 6A, an exemplary method in flowchart form for adaptively filtering a signal in accordance with the present invention is illustrated generally at 600. A signal is received at a receiver (e.g., a receiver of an MT or a BS) (step 605). The received signal is split into I-channel and Q-channel components (step 610). The split I-channel and Q-channel components are low pass filtered and
30 decimated one or more times (step 615). The DC-offset (e.g., if the receiver is a homodyne receiver) is removed (step 620). Either before, during, and/or after (e.g., depending on relative durations and/or whether DC-offset removal is performed), filter coefficient(s) are determined (step 625). The filter coefficient(s) may be

determined, for example, based on relative signal strengths of the received signal(s). The signal resulting from the DC-offset removal is low pass filtered using the determined coefficient(s) (step 630). The low-pass-filtered signal may then be decimated (step 635) before being forwarded for further processing.

5 With reference to FIGURE 6B, another exemplary method in flowchart form for adaptively filtering a signal in accordance with the present invention is illustrated generally at 650. The flowchart 650 may be part of a larger scheme and correspond to, for example, the step 625 of the flowchart 600 of FIGURE 6A. The flowchart 650 begins by receiving I-channel and Q-channel components (step 655). These I-channel
10 and Q-channel components may optionally have already been low pass filtered and decimated (e.g., as performed in the step 615 of the flowchart 600 of FIGURE 6A). The I-channel and Q-channel components each follow two paths. One set of the I-channel and Q-channel components are high pass filtered (e.g., to attempt to isolate the adjacent channel interferer(s)) (step 660). After high pass filtering, the
15 amplitude/power of the adjacent channel may be calculated (step 665).

 For another set of the I-channel and Q-channel components, the amplitude/power of the desired signal as well as the adjacent channel (e.g., the total power) may be calculated (step 670). The results of the two amplitude/power calculations (from steps 665 and 670) may be used to determine the C/I power ratio
20 (step 675). From the C/I power ratio, the optimal bandwidth of an adjacent channel filter is determined (step 680). Filter coefficients for the adjacent channel filter may be determined based on the determined optimal bandwidth (step 685). The determined filter coefficients may be used by a low pass filter for filtering out an adjacent channel interferer (e.g., as performed by the step 630 in the flowchart 600 of
25 the FIGURE 6A).

 Although preferred embodiment(s) of the method and system of the present invention have been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the present invention is not limited to the embodiment(s) disclosed, but is capable of numerous rearrangements,
30 modifications, and substitutions without departing from the spirit and scope of the present invention as set forth and defined by the following claims.

WHAT IS CLAIMED IS:

1. A method for adaptively filtering a signal, comprising the steps of:
receiving a signal;
5 processing the signal to produce a first processed signal, the first processed signal including a desired portion and an adjacent portion;
removing a direct current (DC) offset of the first processed signal to produce a second processed signal;
determining filter coefficients based on relative signal strengths of the
10 desired portion and the adjacent portion; and
low pass filtering the second processed signal utilizing the filter coefficients to produce a third processed signal.
2. The method according to Claim 1, wherein said step of processing the
15 signal to produce a first processed signal comprises the steps of:
splitting the signal into an in-phase (I) channel component and a quadrature-phase (Q) channel component;
low pass filtering each of the I channel component and the Q channel component; and
20 decimating each of the I channel component and the Q channel component.
3. The method according to Claim 1, wherein said step of removing a direct current (DC) offset of the first processed signal to produce a second processed
25 signal comprises the steps of:
storing the first processed signal to produce a stored first processed signal;
determining a DC level value of the first processed signal; and
subtracting the DC level value from the stored first processed signal to
30 produce the second processed signal.

4. The method according to Claim 1, further comprising the steps of:
decimating the third processed signal to produce a fourth processed
signal; and
5 forwarding the fourth processed signal for further processing.
5. The method according to Claim 1, wherein said step of determining
filter coefficients based on relative signal strengths of the desired portion and the
adjacent portion comprises the steps of:
10 high pass filtering the first processed signal to substantially extract the
adjacent portion;
calculating the power of the adjacent portion;
calculating the power of the first processed signal;
determining a power ratio responsive to the power of the adjacent
15 portion and the power of the first processed signal;
determining a bandwidth for an adjacent channel filter based on the
power ratio; and
determining filter coefficients for the adjacent channel filter responsive
to the bandwidth of the adjacent channel filter.
20
6. The method according to Claim 1, wherein said step of determining is
performed at least once per burst in a time division multiple access (TDMA) scheme.

7. A method for adaptively filtering a signal, comprising the steps of:
receiving a signal, the signal including a desired portion and an adjacent portion;

5 high pass filtering the signal to produce an adjacent channel signal;

calculating the power of the adjacent channel signal;

calculating the power of the signal;

determining a power ratio responsive to the power of the adjacent channel signal and the power of the signal;

10 determining a bandwidth for a channel filter based on the power ratio;

and

low pass filtering the signal or a derivative of the signal using the channel filter configured responsive to the bandwidth.

15 8. The method according to Claim 7, wherein said steps of calculating the power of the adjacent channel signal and calculating the power of the signal are accomplished by estimating an amplitude of the adjacent channel signal and the signal, respectively, according to the following formula:

$$Amp = Max(I, Q) + 0.5 * Min(I, Q),$$

20 where "I" represents an in-phase (I) component and "Q" represents a quadrature-phase (Q) component for each amplitude for each of the adjacent channel signal and the signal, respectively.

9. The method according to Claim 7, wherein said step of determining a power ratio responsive to the power of the adjacent channel signal and the power of the signal is accomplished according to the following formula:

$$power\ ratio = \frac{power\ of\ the\ signal - power\ of\ the\ adjacent\ channel\ signal}{power\ of\ the\ adjacent\ channel\ signal}.$$

10. The method according to Claim 7, wherein said step of determining a bandwidth for a channel filter based on the power ratio comprises the steps of:
- comparing the power ratio to a list of power ratios;
 - selecting a selected power ratio from the list of power ratios that is
 - 5 closest to the power ratio; and
 - determining the bandwidth that corresponds to the selected power ratio in the list of power ratios.
11. The method according to Claim 7, wherein said step of low pass
- 10 filtering the signal or a derivative of the signal using the channel filter configured responsive to the bandwidth comprises the steps of:
- ascertaining a set of filter coefficients that provide a filtering bandwidth substantially equivalent to the bandwidth; and
 - applying the set of filter coefficients to a low pass filter.
- 15
12. The method according to Claim 7, wherein the method is performed at least once per burst in a time division multiple access (TDMA) scheme.
13. An apparatus for adaptively filtering a signal, comprising:
- 20 at least one analog-to-digital (A/D) converter, said at least one A/D converter receiving an analog signal and outputting a digital signal, the digital signal including a desired portion and an adjacent portion;
- a direct current (DC) offset part, said DC offset part adapted for receiving the digital signal or a derivative thereof and compensating for a DC offset to
 - 25 produce a compensated signal;
 - a filter coefficient determiner, said filter coefficient determiner adapted for receiving the digital signal or the derivative thereof and producing as output a filter control signal based on relative signal strengths of the desired portion and the adjacent portion; and
- 30 at least one filter, said at least one filter receiving the filter control signal and being controlled thereby, said at least one filter adapted for filtering the compensated signal and producing a filtered output signal responsive to the filter control signal.

14. The apparatus according to Claim 13, further comprising:
at least one low pass filter, said at least one low pass filter receiving the digital signal and filtering the digital signal to filter out higher frequencies and to produce a first derivative digital signal; and
5 at least one decimator, said at least one decimator receiving the first derivative digital signal and decimating the first derivative digital signal to reduce the number of digital samples and produce a second derivative digital signal.
- 10 15. The apparatus according to Claim 14, wherein the second derivative digital signal comprises the derivative of the digital signal that is received by said DC offset part and said filter coefficient determiner.
- 15 16. The apparatus according to Claim 14, wherein the second derivative digital signal is further low-pass filtered and decimated before comprising the derivative of the digital signal that is received by said DC offset part and said filter coefficient determiner.
- 20 17. The apparatus according to Claim 13, wherein said DC offset part comprises:
a DC-level determiner, the DC-level determiner adapted for receiving the digital signal or the derivative thereof as input and for producing as output a DC-level value associated with the digital signal or the derivative thereof, respectively;
a memory, the memory adapted for receiving and storing the digital
25 signal or the derivative thereof; and
at least one subtractor, the at least one subtractor adapted for determining the difference between the digital signal or the derivative thereof and the DC-level value.

18. The apparatus according to Claim 13, further comprising:
at least one decimator, said at least one decimator adapted for receiving
the filtered output signal and decimating the filtered output signal to reduce the
5 number of digital samples and produce a desired signal that is forwarded for further
processing.

19. The apparatus according to Claim 13, wherein said filter coefficient
determiner comprises:
10 at least one high pass filter, said at least one high pass filter adapted for
receiving the digital signal or the derivative thereof and high pass filtering the signal
to produce an adjacent channel signal;
a first power calculator, said first power calculator adapted for
receiving the adjacent channel signal and calculating the power of the adjacent
15 channel signal;
a second power calculator, said second power calculator adapted for
receiving the digital signal or the derivative thereof and calculating the power of the
signal; and
a filter coefficient selector, said filter coefficient selector determining a
20 power ratio responsive to the power of the adjacent channel signal and the power of
the signal, said filter coefficient selector adapted for determining a bandwidth for a
channel filter based on the power ratio and for ascertaining a plurality of filter
coefficients based on the bandwidth, the filter control signal comprising the plurality
of filter coefficients.

25

20. The apparatus according to Claim 13, wherein the apparatus comprises
a homodyne-based receiver.

21. The apparatus according to Claim 13, wherein the apparatus comprises
30 a mobile terminal operating substantially in accordance with the Global System for
Mobile Communications ++ (GSM++) standard.

22. The apparatus according to Claim 13, wherein the apparatus comprises a base station operating substantially in accordance with the Global System for Mobile Communications ++ (GSM++) standard.

5 23. The apparatus according to Claim 13, wherein the filter control signal comprises a plurality of filter coefficients.

24. The apparatus according to Claim 13, wherein said at least one A/D converter, said DC offset part, said filter coefficient determiner, and said at least one
10 filter are comprised, at least partially, of software.

25. An arrangement for adaptively filtering a signal, comprising:
at least one high pass filter, said at least one high pass filter adapted for receiving a signal and high pass filtering the signal to produce an adjacent channel
15 signal, the signal including a desired portion and an adjacent portion;
a first power calculator, said first power calculator adapted for receiving the adjacent channel signal and calculating the power of the adjacent channel signal;
a second power calculator, said second power calculator adapted for
20 receiving the signal and calculating the power of the signal; and
a filter coefficient selector, said filter coefficient selector determining a power ratio responsive to the power of the adjacent channel signal and the power of the signal, said filter coefficient selector adapted for determining a bandwidth for a channel filter based on the power ratio and for ascertaining a plurality of filter
25 coefficients based on the bandwidth.

26. The arrangement according to Claim 25, wherein said first power calculator and said second power calculator perform their respective calculations by estimating the amplitude of the adjacent channel signal and the signal, respectively,
5 according to the following formula:

$$Amp = Max(I, Q) + 0.5 * Min(I, Q),$$

where "I" represents an in-phase (I) component and "Q" represents a quadrature-phase (Q) component for each amplitude for each of the adjacent channel signal and the signal, respectively.
10

27. The arrangement according to Claim 25, wherein said filter coefficient selector determines a power ratio responsive to the following formula:

$$power\ ratio = \frac{power\ of\ the\ signal - power\ of\ the\ adjacent\ channel\ signal}{power\ of\ the\ adjacent\ channel\ signal}.$$

15 28. The arrangement according to Claim 25, further comprising:
a memory, said memory storing a plurality of power ratio values in a look up table, each power ratio value of said plurality of power ratio values associated in said memory with a corresponding bandwidth; and
wherein said filter coefficient selector is further adapted for accessing
20 said memory to determine a selected power ratio that is closest to the power ratio and for retrieving the corresponding bandwidth that is associated with the selected power ratio.

29. The arrangement according to Claim 25, further comprising:
a memory, said memory storing a plurality bandwidths, each
bandwidth of said plurality of bandwidths associated in said memory with a
5 corresponding set of filter coefficients; and
wherein said filter coefficient selector is further adapted for accessing
said memory to determine a selected bandwidth that is closest to the bandwidth and
for retrieving the corresponding set of filter coefficients that is associated with the
selected bandwidth.
- 10 30. The arrangement according to Claim 25, further comprising:
an adjacent channel filter, said adjacent channel filter adapted for
filtering responsive to received filter coefficients; and
wherein said filter coefficient selector is further adapted for providing
15 said plurality of filter coefficients to said adjacent channel filter.
31. The arrangement according to Claim 25, wherein the arrangement
comprises at least part of a homodyne-based receiver.
- 20 32. The arrangement according to Claim 25, wherein said at least one high
pass filter, said first power calculator, said second power calculator, and said filter
coefficient selector are comprised, at least partially, of software.
33. The arrangement according to Claim 25, wherein the arrangement
25 comprises at least part of a mobile terminal.
34. The arrangement according to Claim 25, wherein the arrangement
comprises at least part of a base station.

35. A receiver for adaptively filtering a signal, comprising:
means for receiving a signal;
means for processing the signal to produce a first processed signal, the
first processed signal including a desired portion and an adjacent portion;
5 means for removing a direct current (DC) offset of the first processed
signal to produce a second processed signal;
means for determining filter coefficients based on relative signal
strengths of the desired portion and the adjacent portion; and
means for low pass filtering the second processed signal utilizing the
10 filter coefficients to produce a third processed signal.
36. An arrangement for adaptively filtering a signal, comprising:
means for receiving a signal, the signal including a desired portion and
an adjacent portion;
15 means for filtering the signal to produce an adjacent channel signal;
means for calculating the power of the adjacent channel signal and for
calculating the power of the signal;
means for determining a power ratio responsive to the power of the
adjacent channel signal and the power of the signal;
20 means for determining a bandwidth for a channel filter based on the
determined power ratio;
means for configuring the channel filter responsive to the determined
bandwidth; and
means for channel filtering the signal or a derivative of the signal using
25 the configured channel filter.

37. An apparatus for rejecting an adjacent channel, comprising:
- an adjacent channel filter, said adjacent channel filter receiving a control signal input, said adjacent channel filter configured to reject an adjacent channel and to pass a desired channel responsive to the control signal input; and
- 5 a control signal determiner, said control signal determiner receiving a signal that includes the adjacent channel and the desired channel, said control signal determiner configured to process the signal and to produce the control signal input, the control signal input based on relative power levels of the adjacent channel and the
- 10 desired channel.

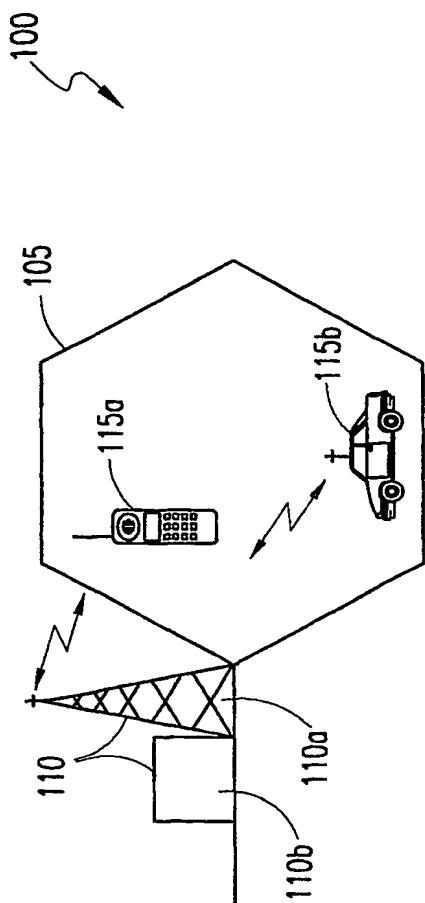


FIG. 1

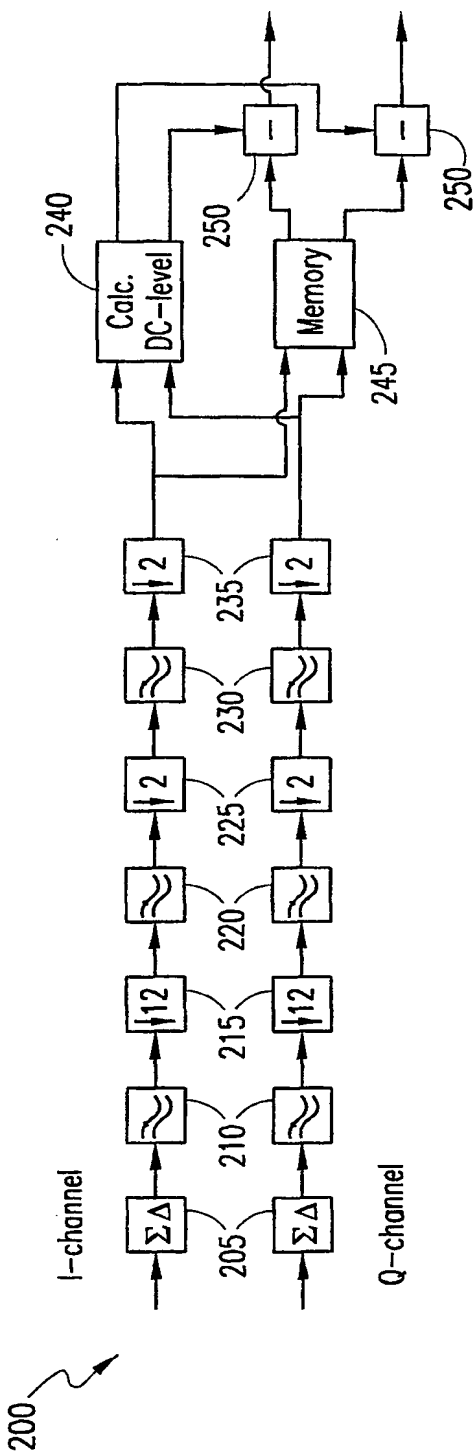


FIG. 2

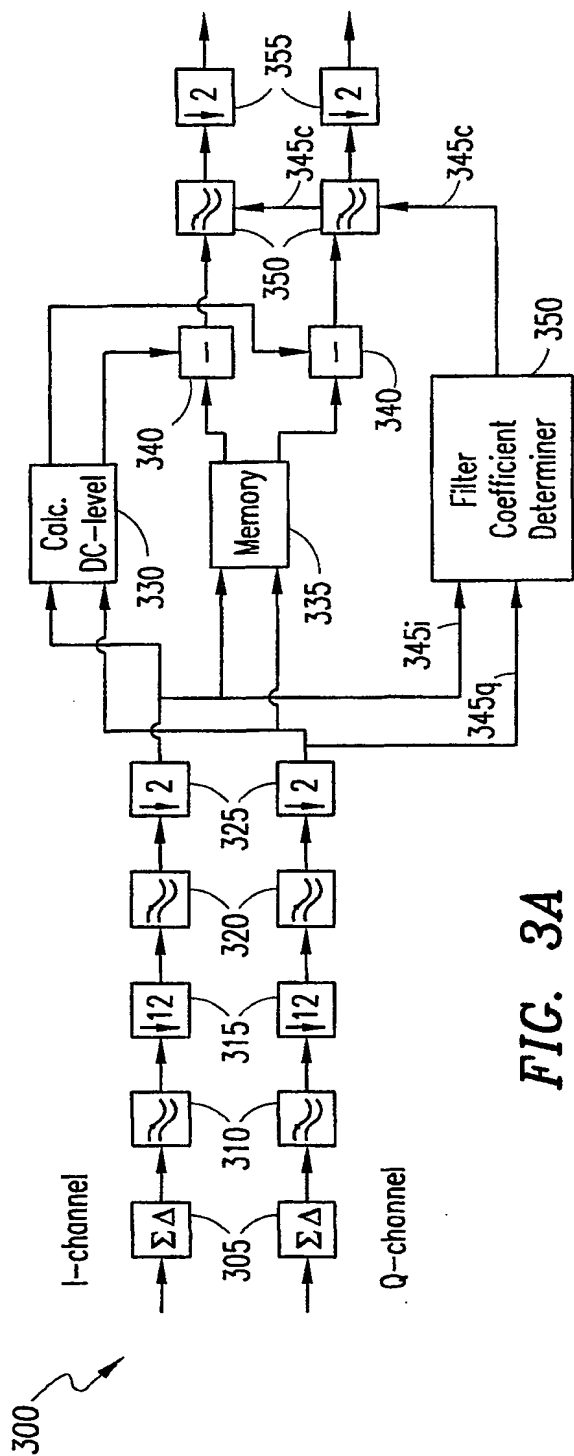


FIG. 3A

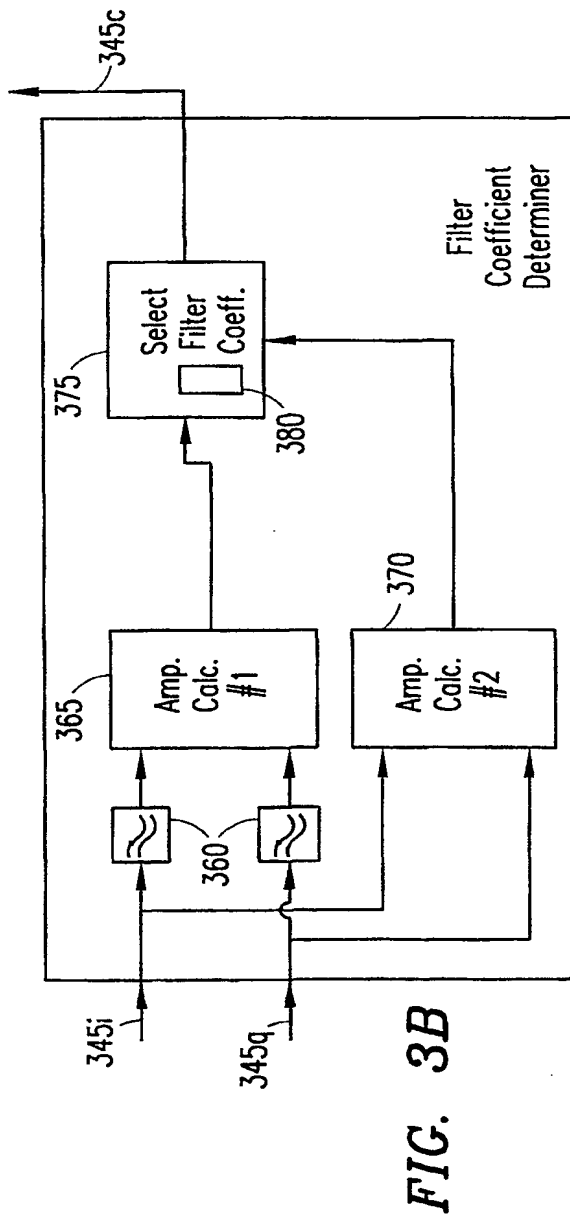
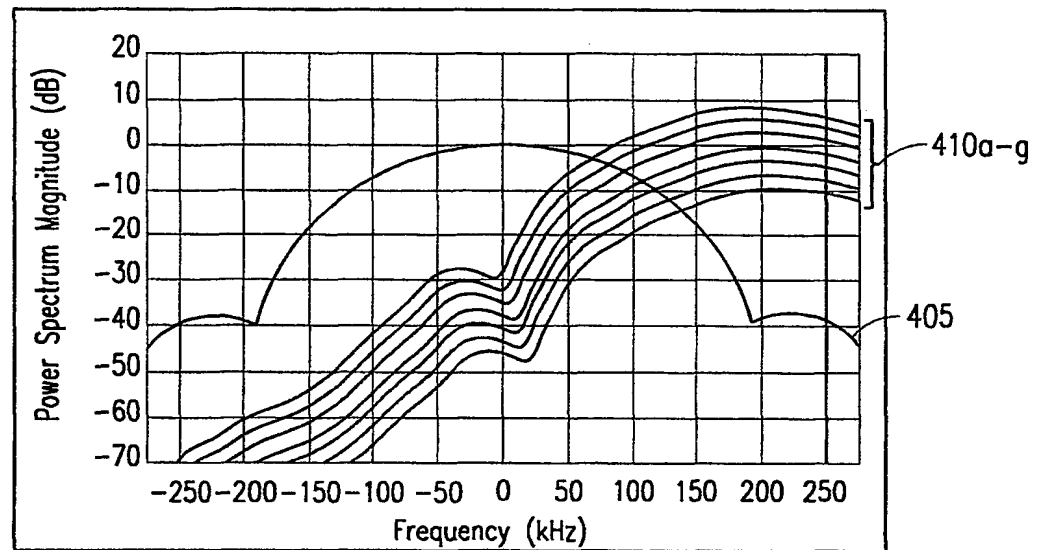


FIG. 3B

3/5

400


**FIG. 4**

500


C/I Adj200kHz [dB]	Filter Bw [kHz]
-12	78
-9	82
-6	93
-3	100
0	107
3	117
6	123

FIG. 5

4/5

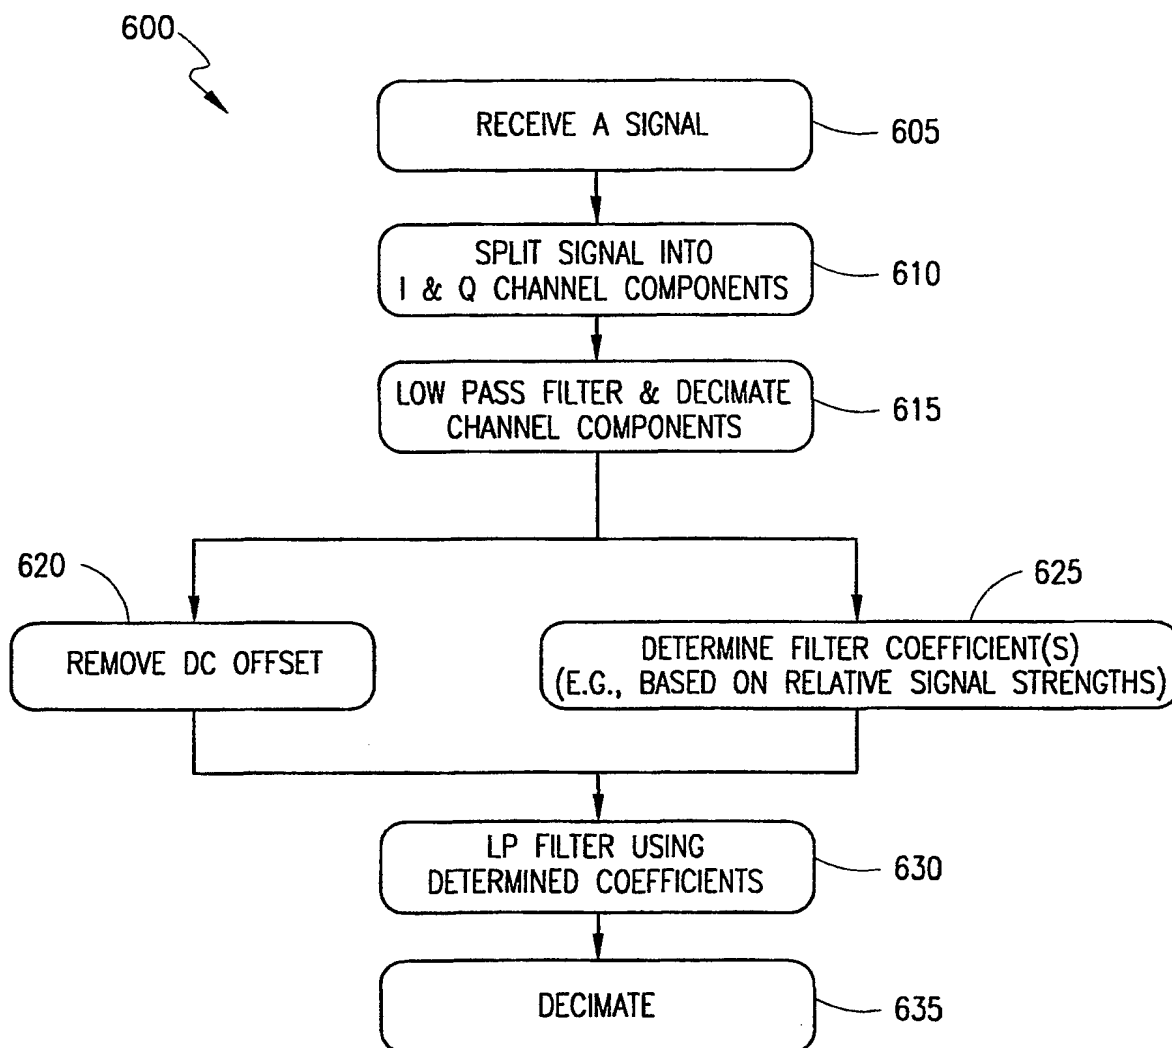**FIG. 6A**

5/5

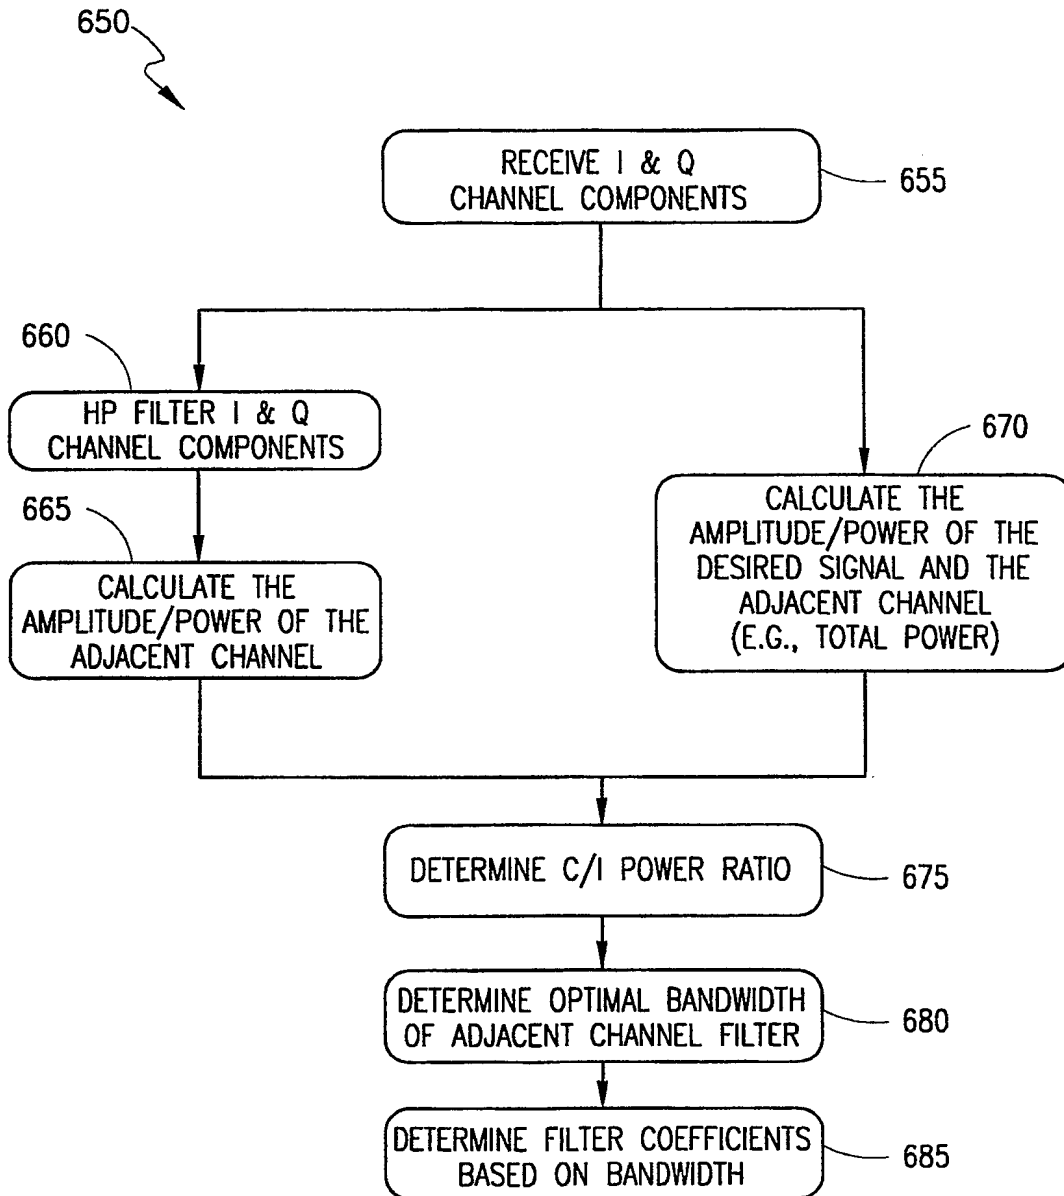**FIG. 6B**

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/11084

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L27/233 H04L25/06 H04B17/00 H04B1/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX, IBM-TDB

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>GB 2 328 353 A (NEC TECHNOLOGIES) 17 February 1999 (1999-02-17)</p> <p>abstract page 1, paragraph 3 - paragraph 5 page 2, paragraph 2 page 3, paragraph 1 page 4, paragraph 2 - paragraph 4 page 5, paragraph 2 claims 1,6,7 figure 1</p> <p>--- -/--</p>	<p>1-4, 6, 13-18, 20-22, 24, 35</p>



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

8 February 2002

Date of mailing of the international search report

19/02/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Reilly, D

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/11084

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 99 35754 A (ERICSSON GE MOBILE INC) 15 July 1999 (1999-07-15)</p> <p>abstract page 2, line 18 - line 26 page 4, line 19 -page 5, line 4 page 6, line 15 -page 7, line 22 claims 1-4</p> <p>-----</p>	<p>1,5-13, 15,16, 19-37</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/11084

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
GB 2328353	A	17-02-1999	AU	739457 B2		11-10-2001
			AU	8000898 A		25-02-1999
			JP	11146023 A		28-05-1999
<hr/>						
WO 9935754	A	15-07-1999	US	6047171 A		04-04-2000
			AU	2107799 A		26-07-1999
			BR	9906797 A		17-10-2000
			CN	1288609 T		21-03-2001
			EP	1046237 A1		25-10-2000
			WO	9935754 A1		15-07-1999
<hr/>						

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.